


MIDI THRU-6 Box(THRU-6)

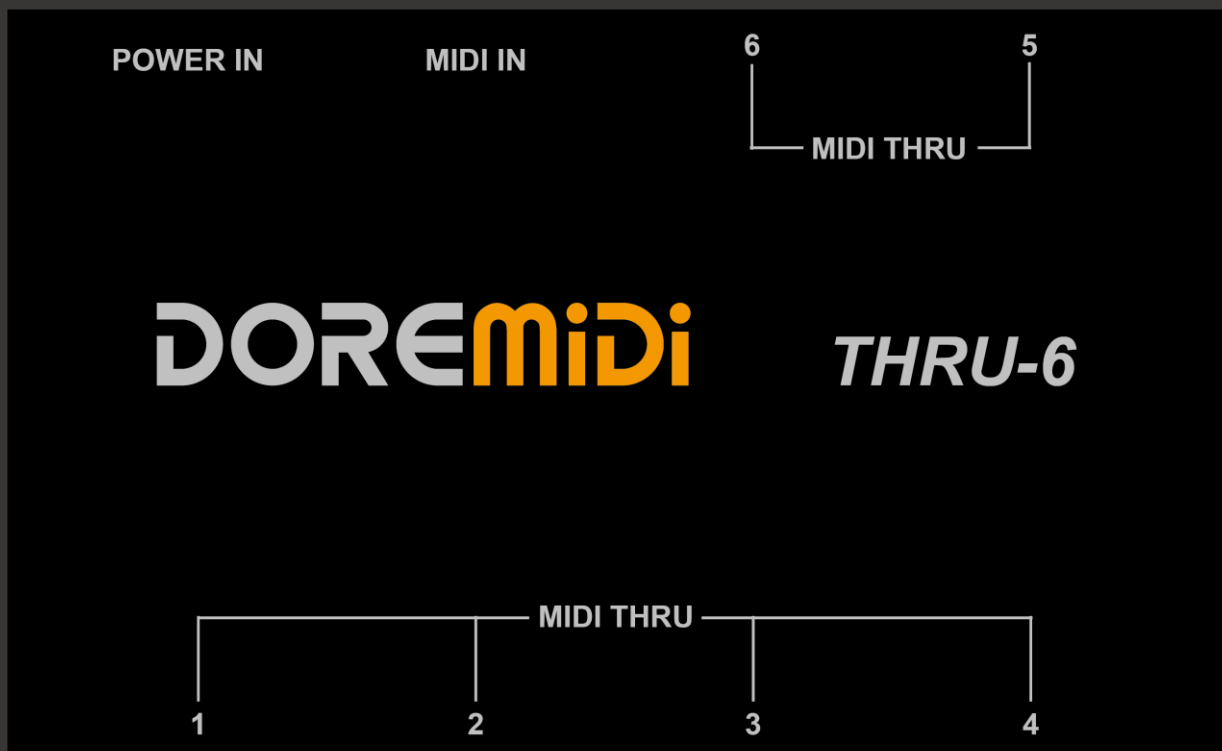

Instructions


1. Product Introduction

MIDI THRU-6 box (hereinafter referred to as product) can be used to convert 1 MIDI input into 6 MIDI outputs. This product has a standard MIDI input interface, MIDI output interface, high-fidelity communication, no delay, with standard MIDI 16 channels, can communicate all standard MIDI commands.

2. Product Parameters

Name	Description
Model	THRU-6
Size(L x W x H)	115*73*33mm
Weight	210g
MIDI Interface	1 input, 6 output, standard MIDI five-pin interface
Power In Interface	Powered by USB-B interface, 5VDC
Indicator Light	Product power indicator
MIDI Compatibility	Compatible with all musical instruments with MIDI standard interface


3. Product Interface

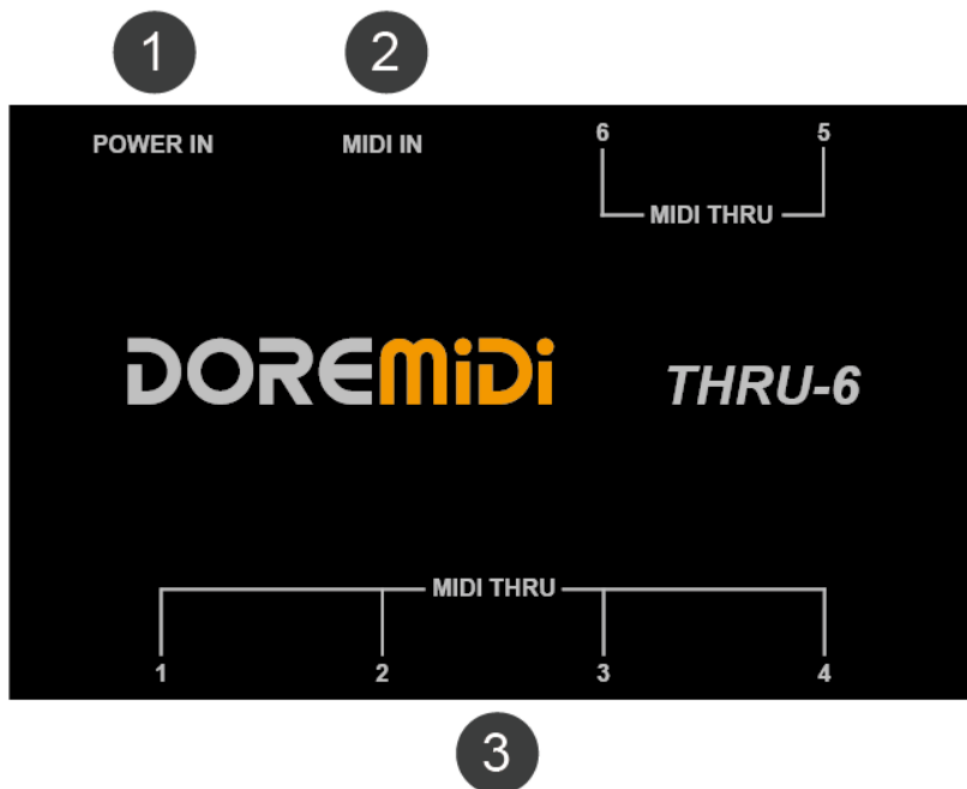

- ① **POWER IN:** Product power supply interface, use USB-B plug to supply power to the product, supply voltage 5V/1A, with power indicator.
- ② **MIDI IN:** MIDI input interface, using a standard five-pin MIDI cable, connected to the output interface of the MIDI device.
- ③ **MIDI THRU1-6:** 6 MIDI output interfaces, using standard five-pin MIDI cable, connected to the input interface of the MIDI device.

4. Product Connection

Support up to 1 MIDI input and 6 MIDI outputs at the same time:

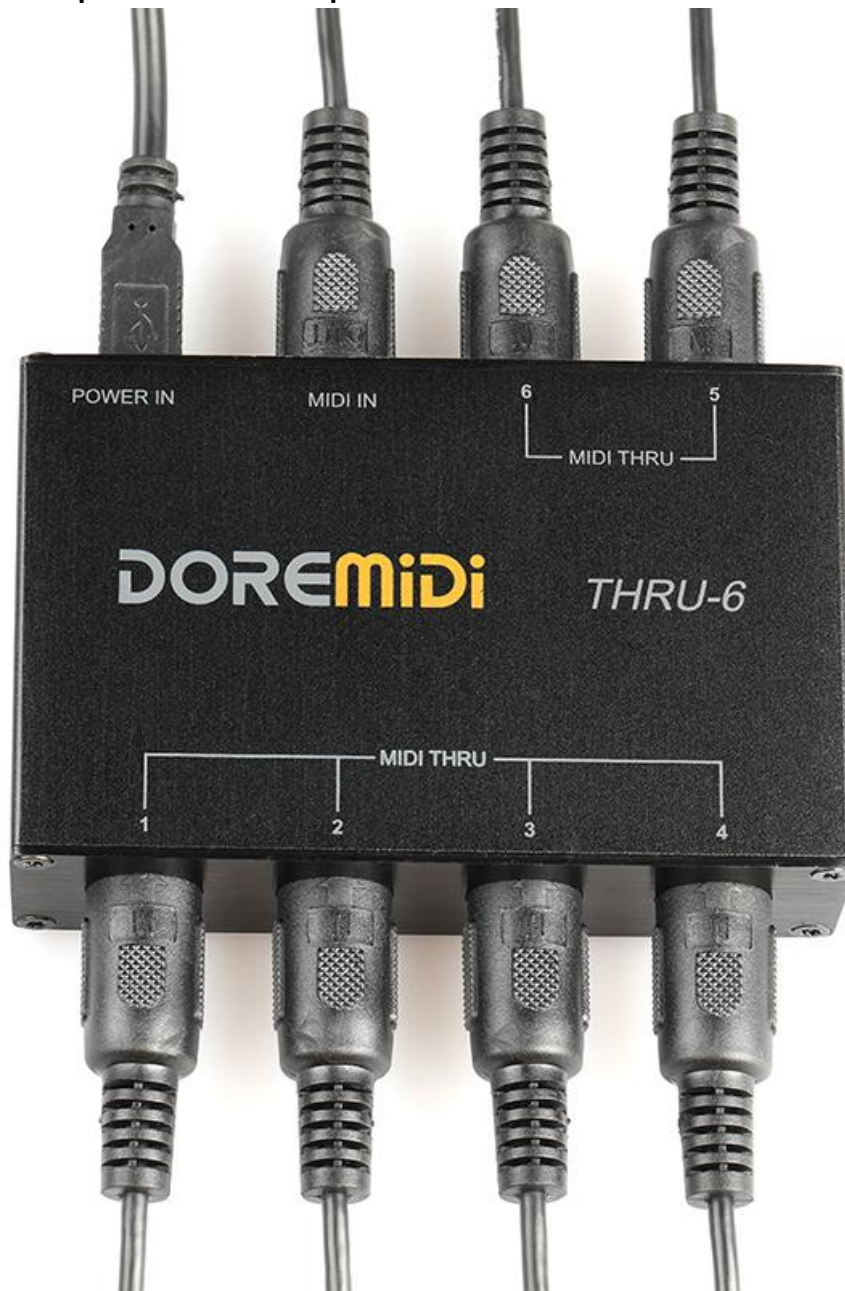

Note: According to the situation, you can choose whether to supply power to the product through POWER IN. In most cases, if you connect 3 or 4 MIDI THRU, you don't need to supply power. However, whether power is supplied or not depends on whether the power of MIDI IN is sufficient.